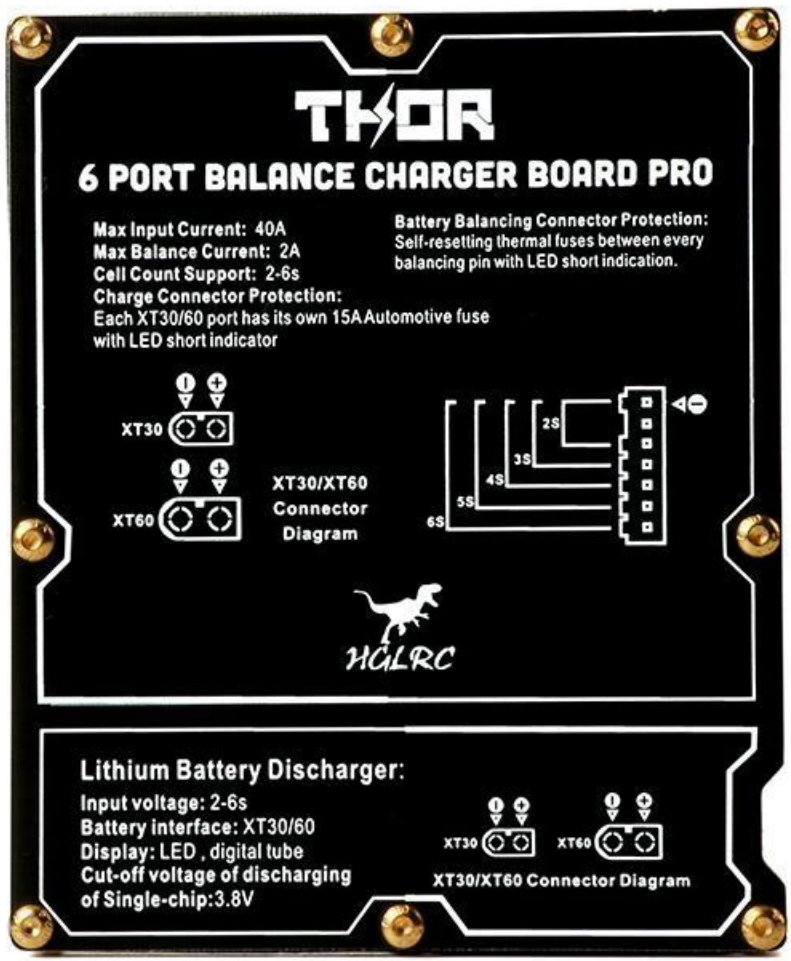

THOR
6 PORT BALANCE CHARGER BOARD PRO
Max Input Current: 40A
Max Balance Current: 2A
Cell Count Support: 2-6s
Charge Connector Protection:
Each XT30/60 port has its own 15A Automotive fuse
with LED short indicator
Battery Balancing Connector Protection:
Self-resetting thermal fuses between every
balancing pin with LED short indication.
XT30
XT60
XT30/XT60
Connector
Diagram
2S
3S
4S
5S
6S
HGLRC
Lithium Battery Discharger:
Input voltage: 2-6s
Battery interface: XT30/60
Display: LED , digital tube
Cut-off voltage of discharging
of Single-chip:3.8V
XT30
XT60
XT30/XT60 Connector Diagram