

HGLRC 60A
4IN1 6S 32-bit MINI V1 ESC

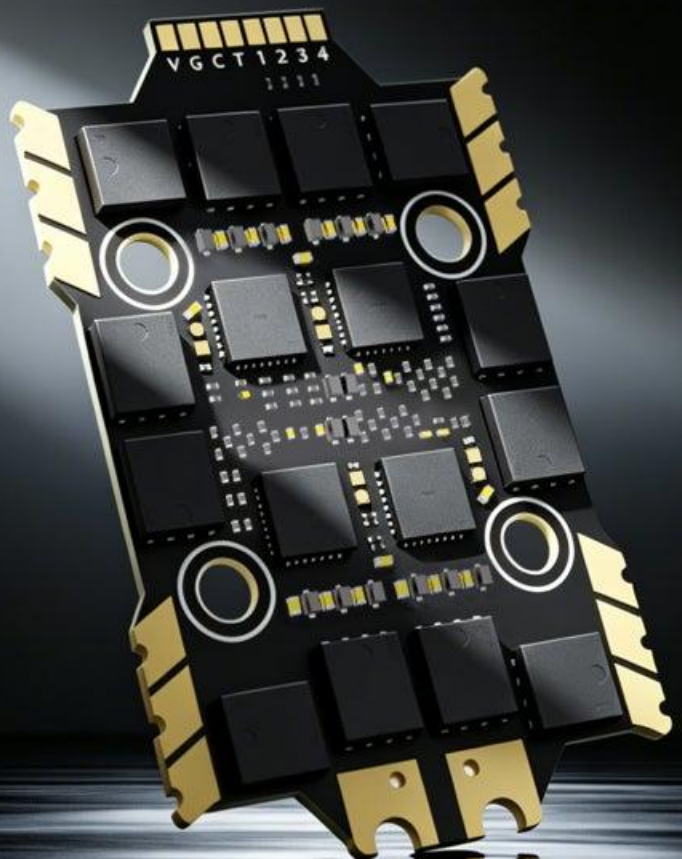

32-bit 60A 4-in-1 ESC


provides stable output and delivers


powerful flight performance

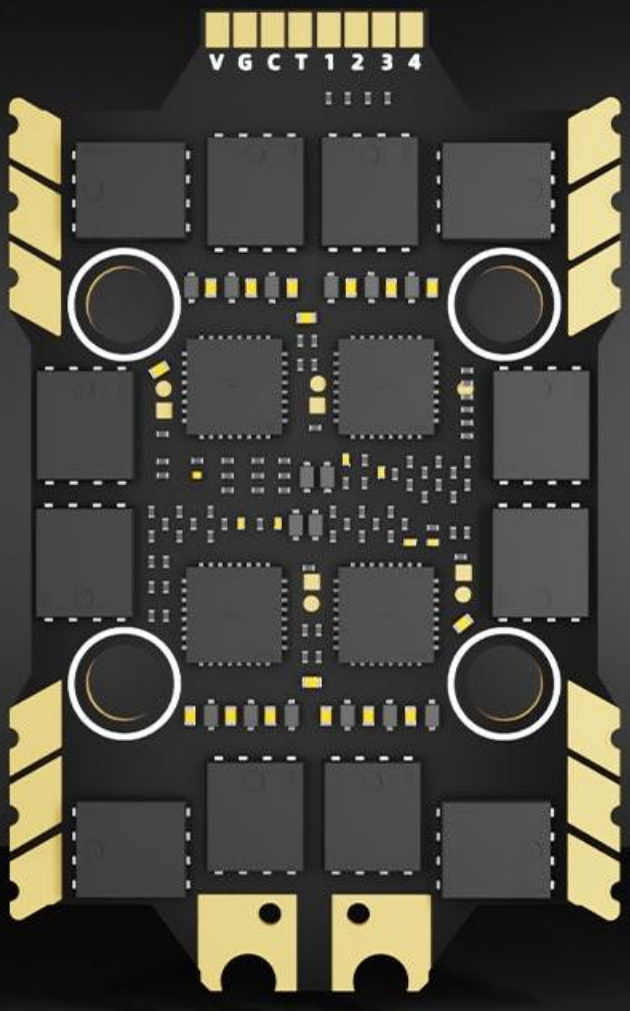


The immersion gold design offers better temperature and current tolerance

Its direct plug-in connection tothe FC simplifies installation

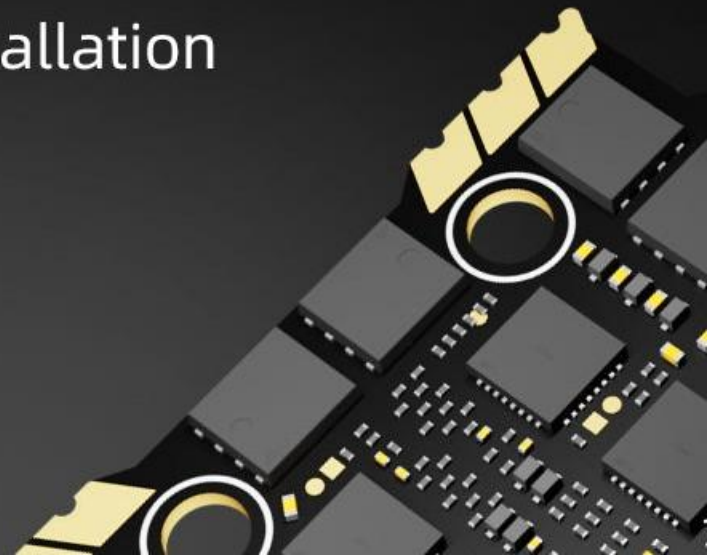


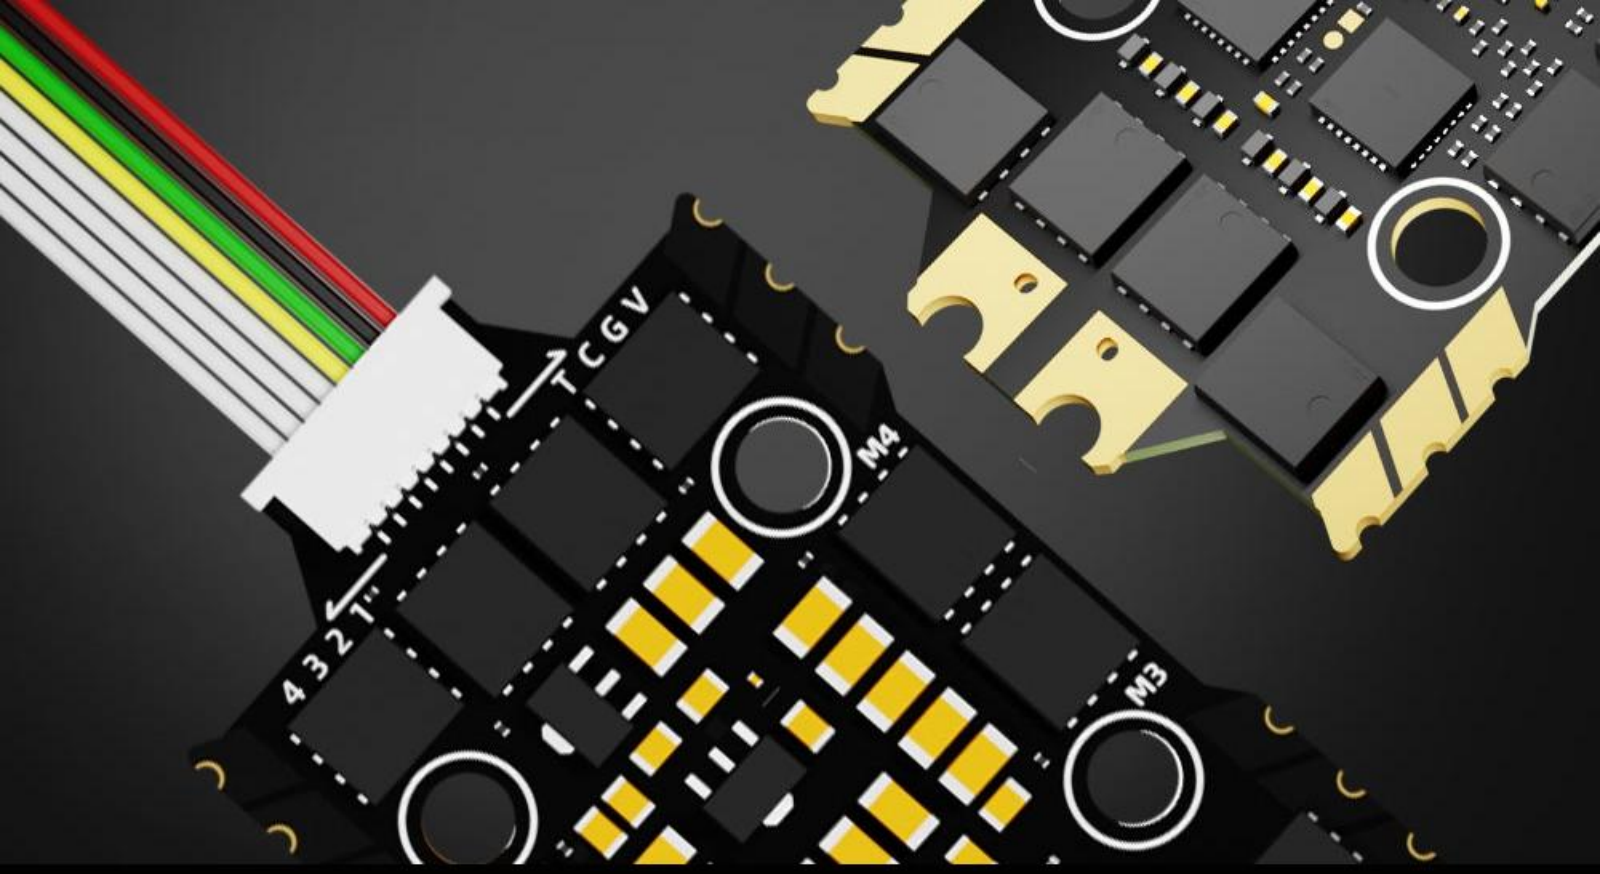


Compatible with DShot600/300

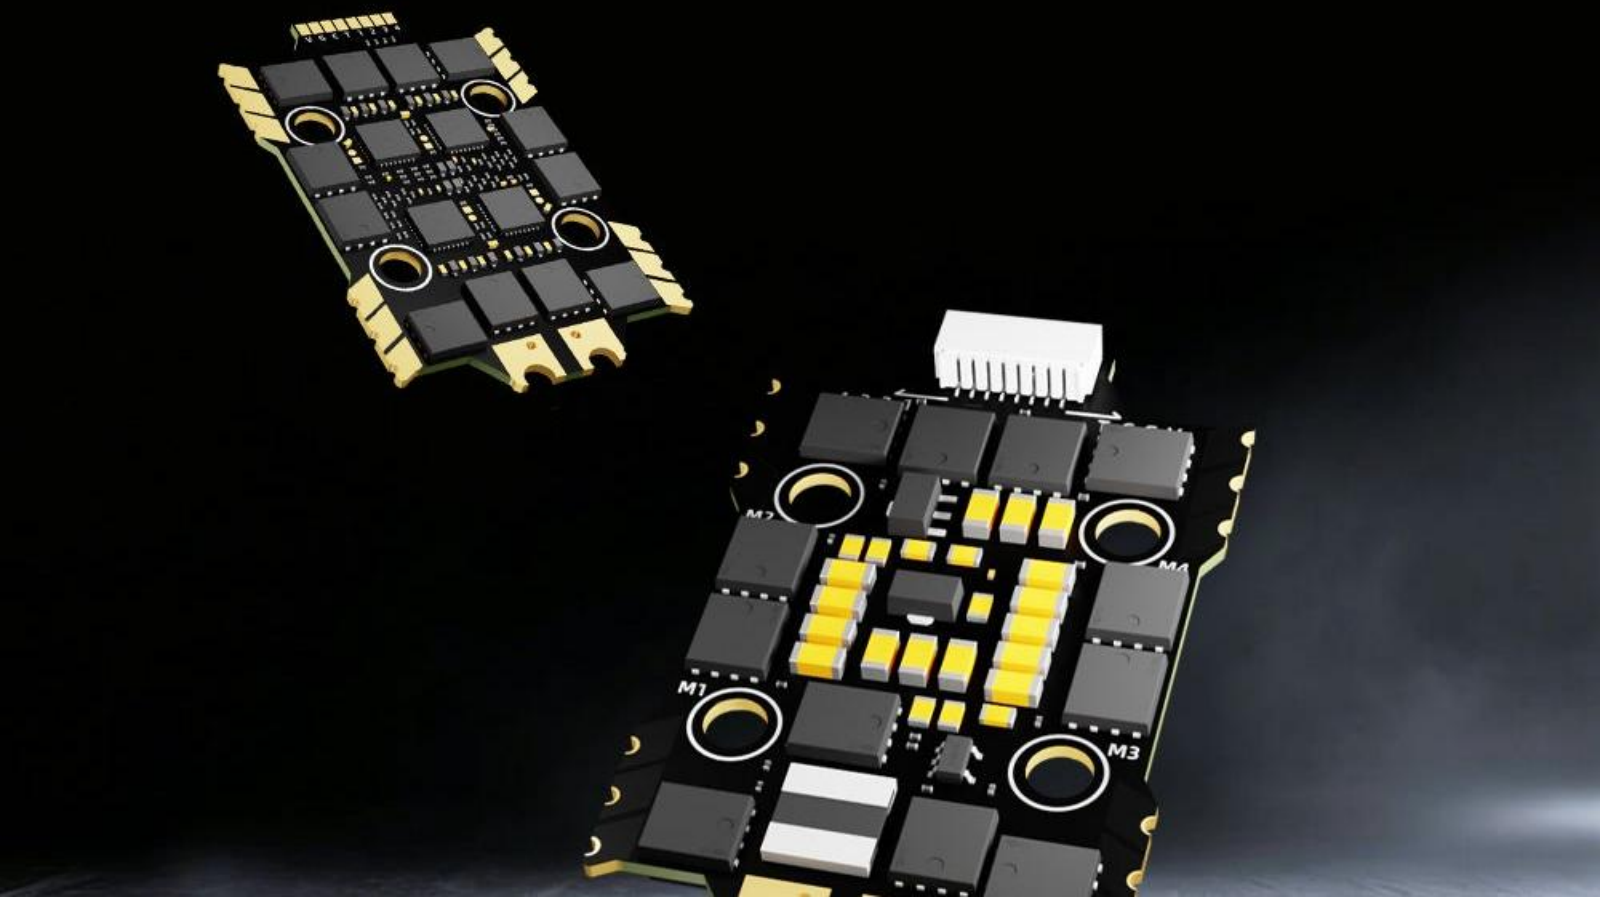


BL32 firmware
delivers a smoother flight experience
and more precise control

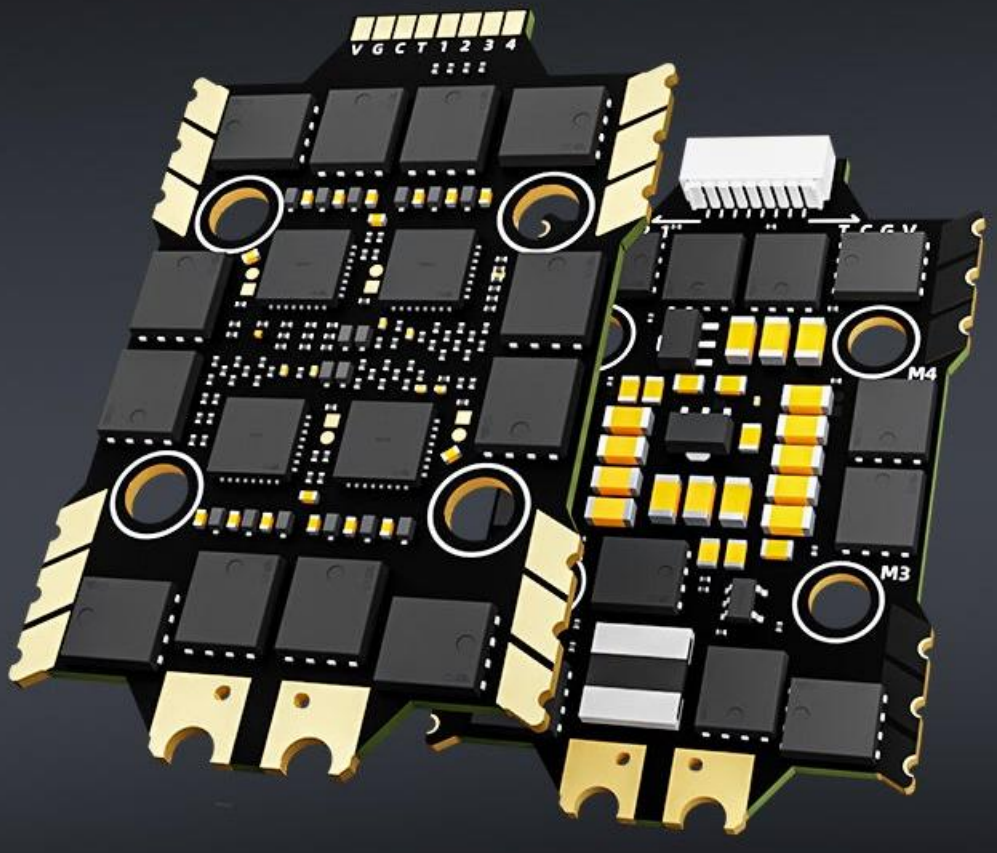


Specification

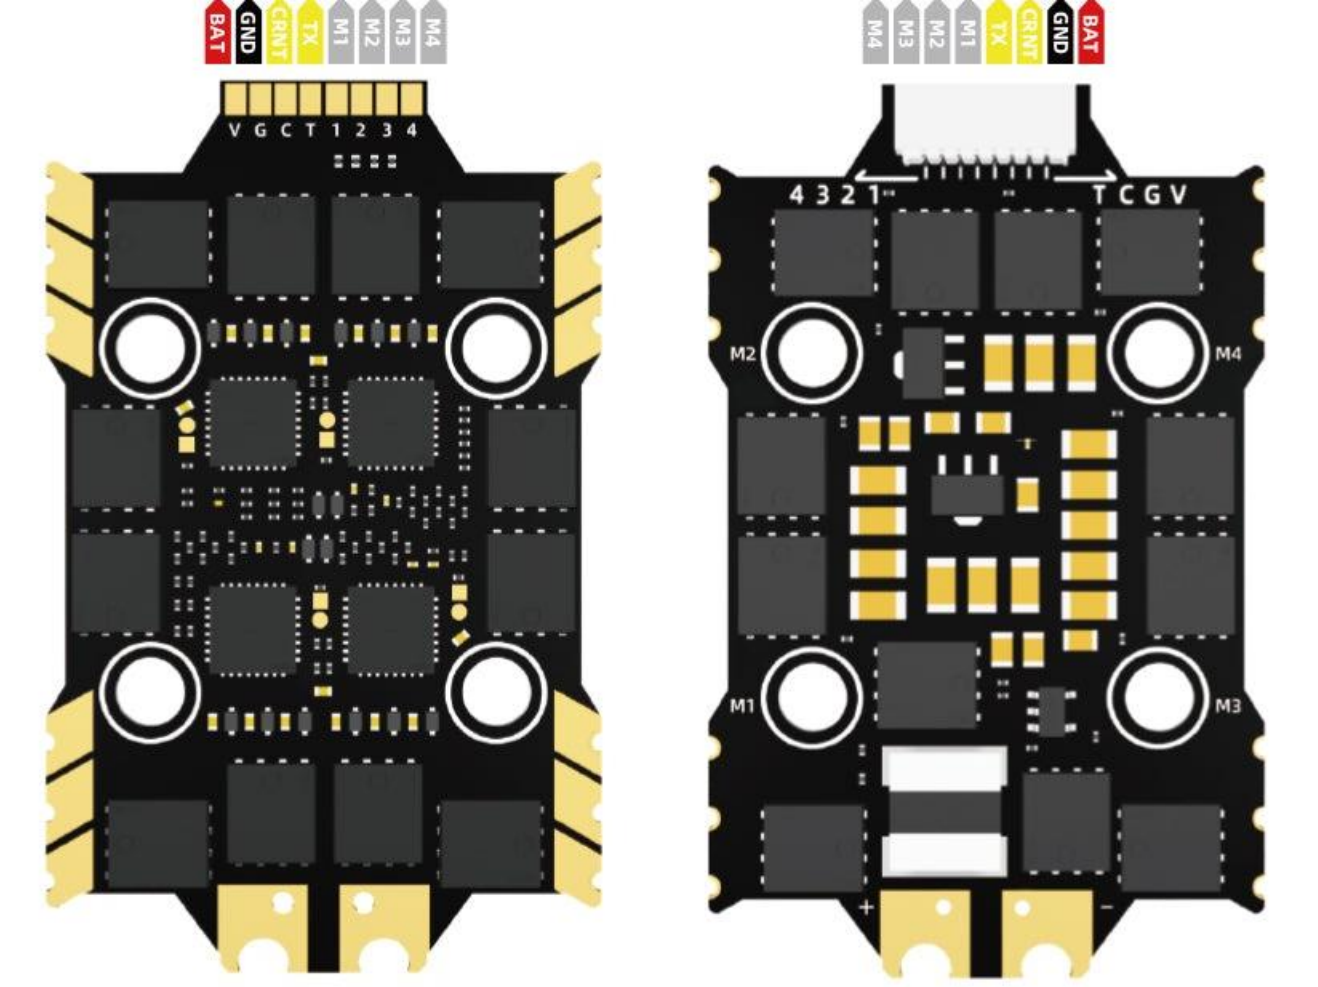
BAT
GND
CRNT
TX
M1
M2
M3
M4
V G C T 1 2 3 4
M4
M3
M2
M1
TX
CRNT
GND
BAT
4 3 2 1
T C G V
M2
M4
M1
M3
+
−

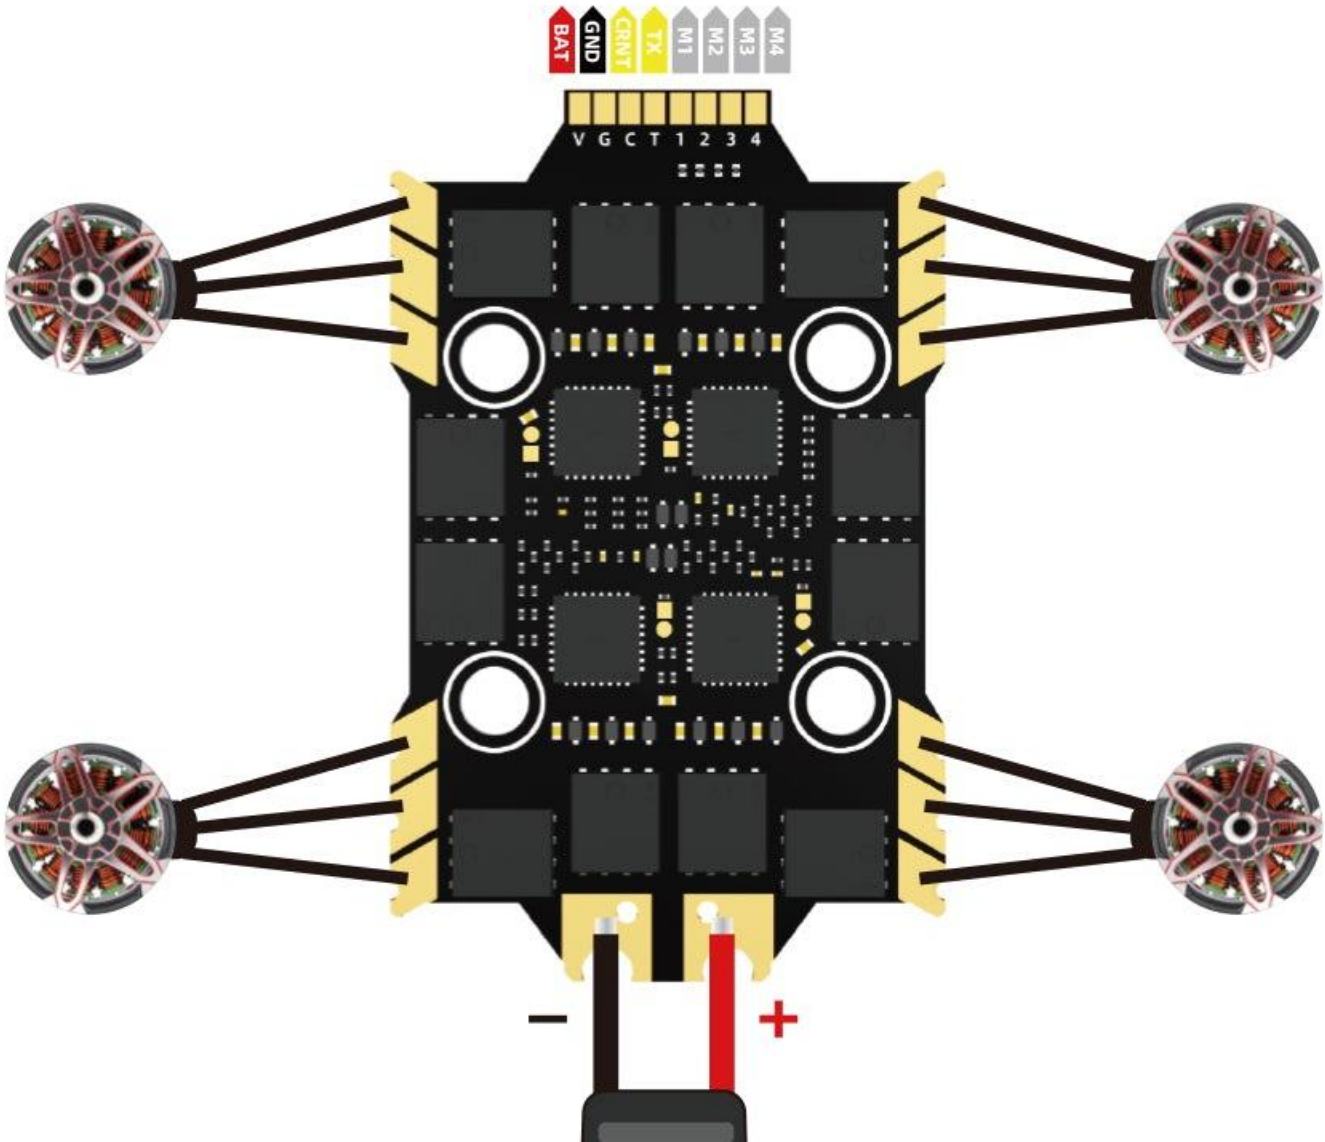
BAT
GND
CRNT
TX
M1
M2
M3
M4
V G C T 1 2 3 4
−
+



Specification

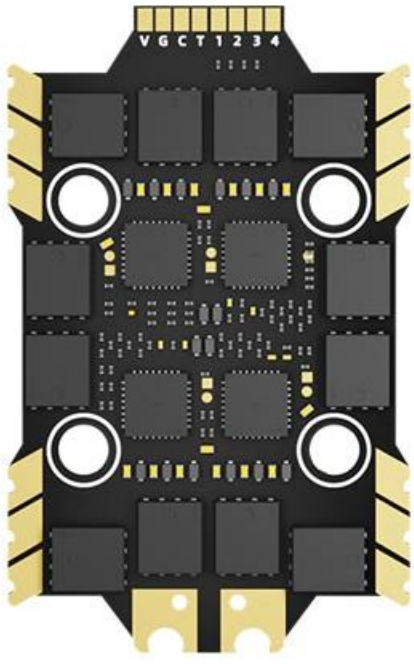

ESC Input Voltage:3-6S

Continuous Current:60A per channel

Peak Current:65A per channel(10 seconds)

Firmware:BL-32(32.10)

ESC Dimensions:52X33mm


Mounting Hole Pattern:20X20mm*M3


Supported Protocols:DShot600/300

Weight:13g

Size/Weight



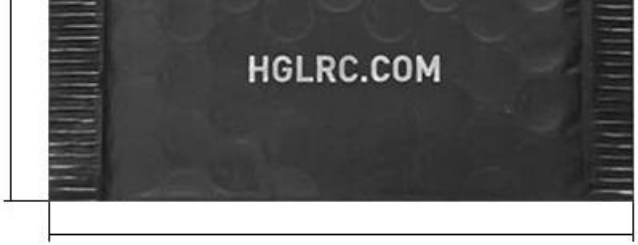

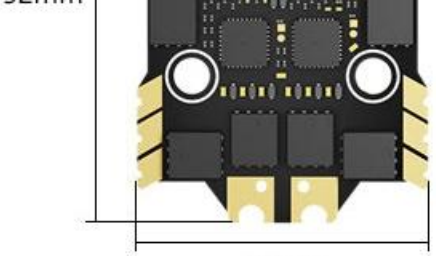

Total Weight:39.6g

Weight:13g

Package List

