
HGLRC


HGLRC 60A 4IN1 MINI 8S 32-bit V1 ESC

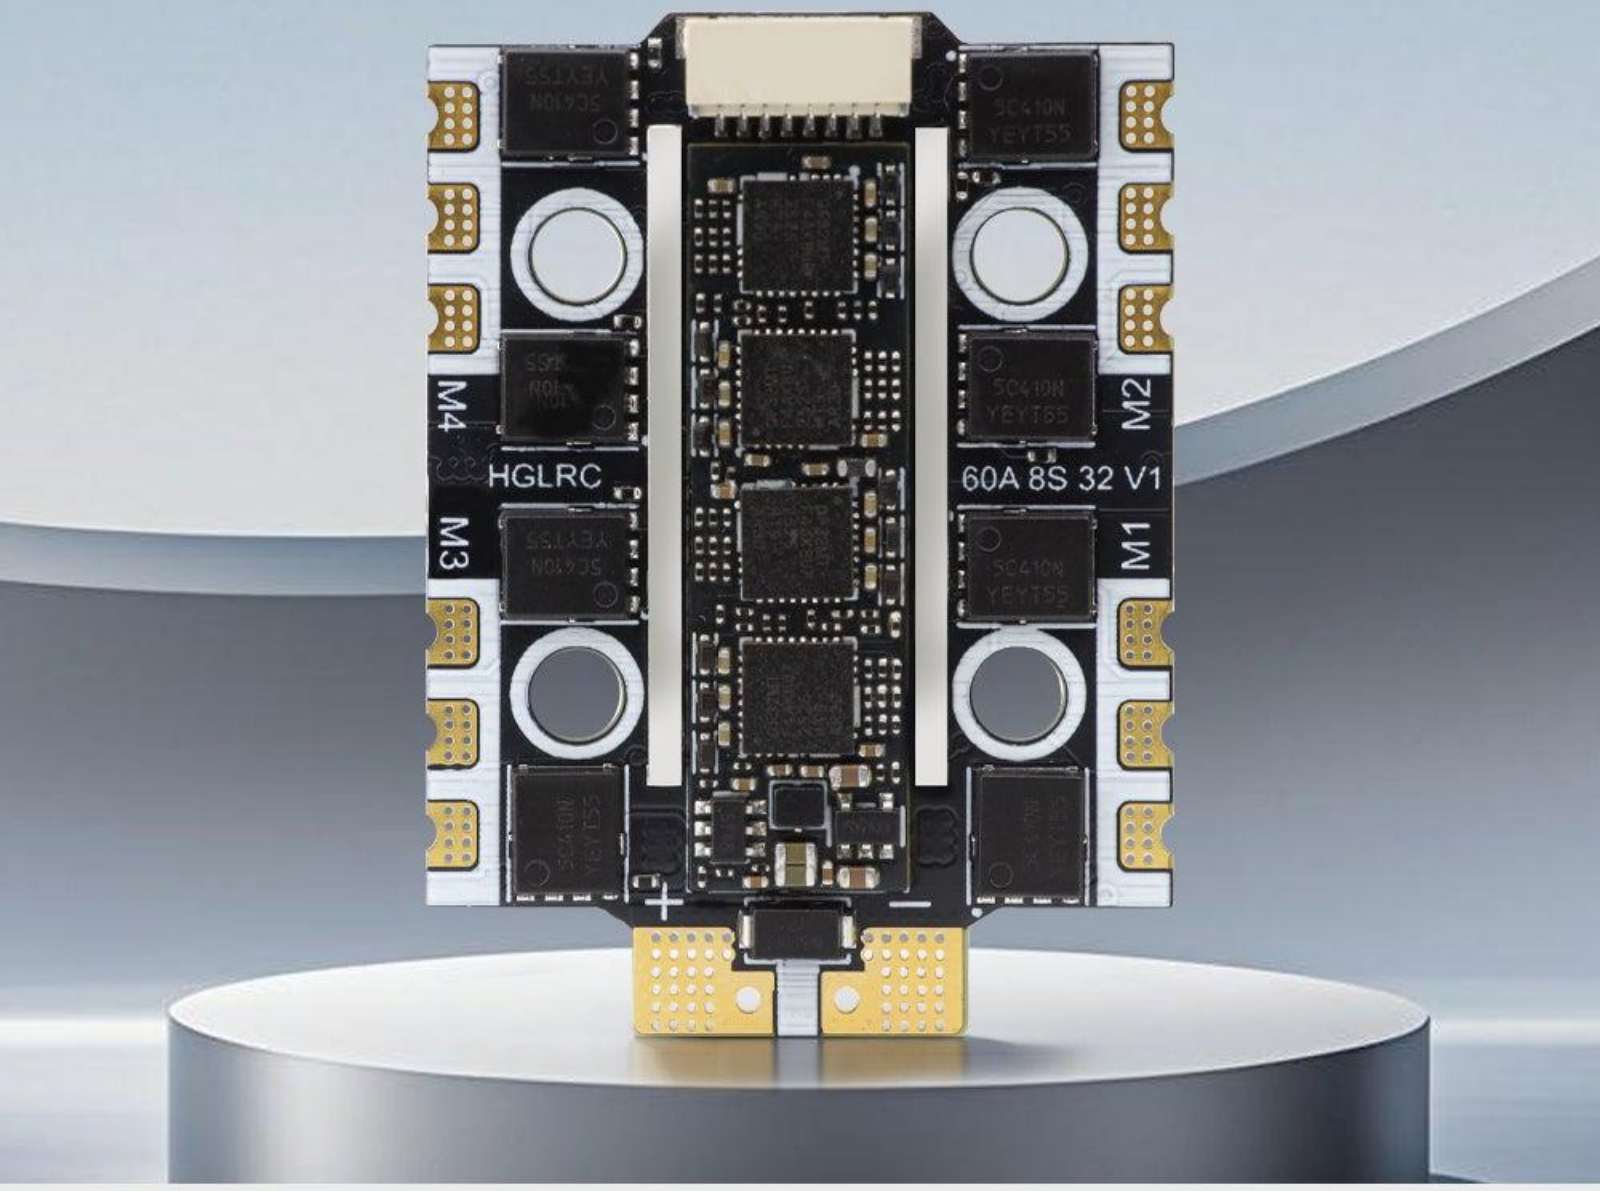

8S high-voltage wide input range

supports 3-8s input


compatible with most drone types

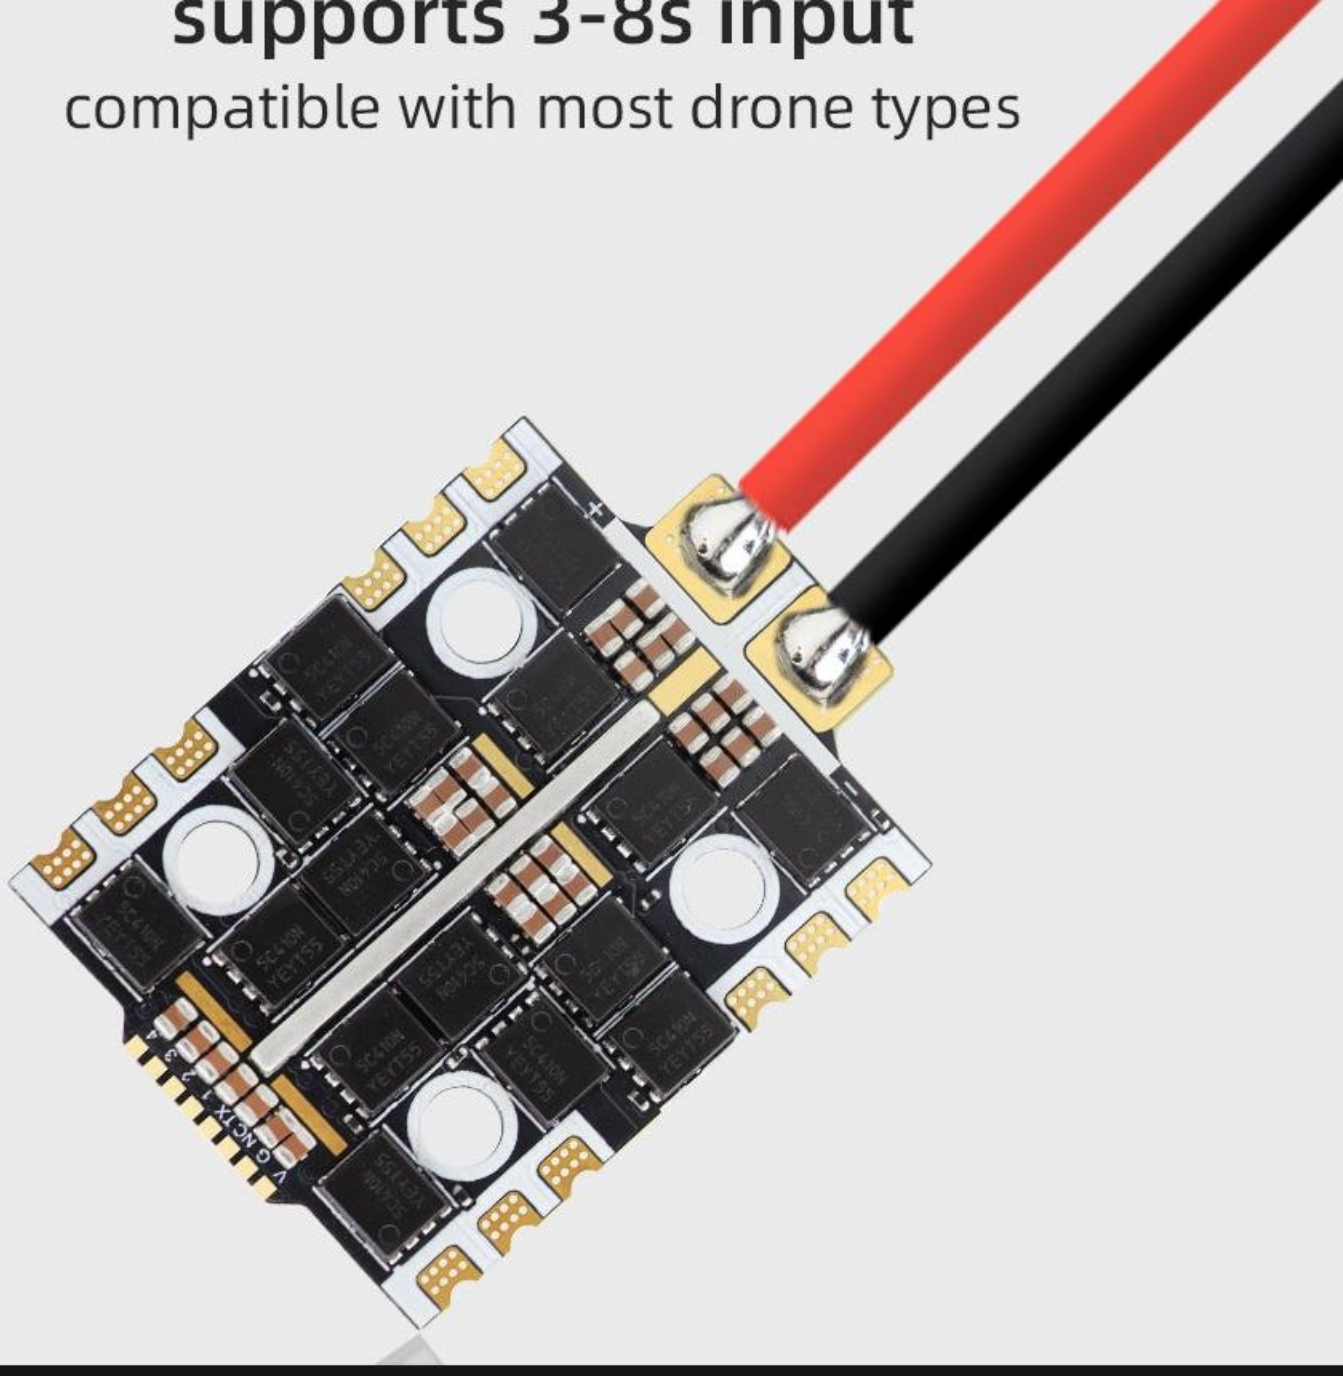

3 pcs high-current copper bars can keep stable


with efficient heat dissipation



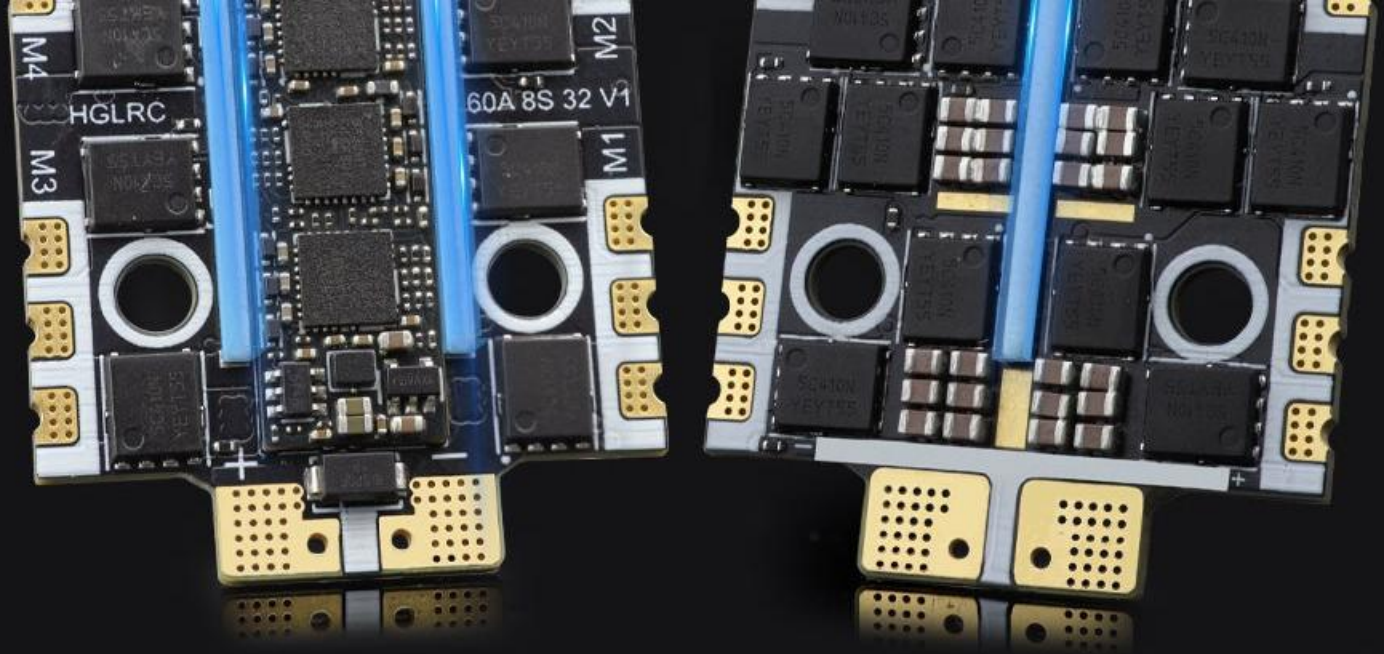


20x20mm MINI size

is compact and lightweight for drone builds

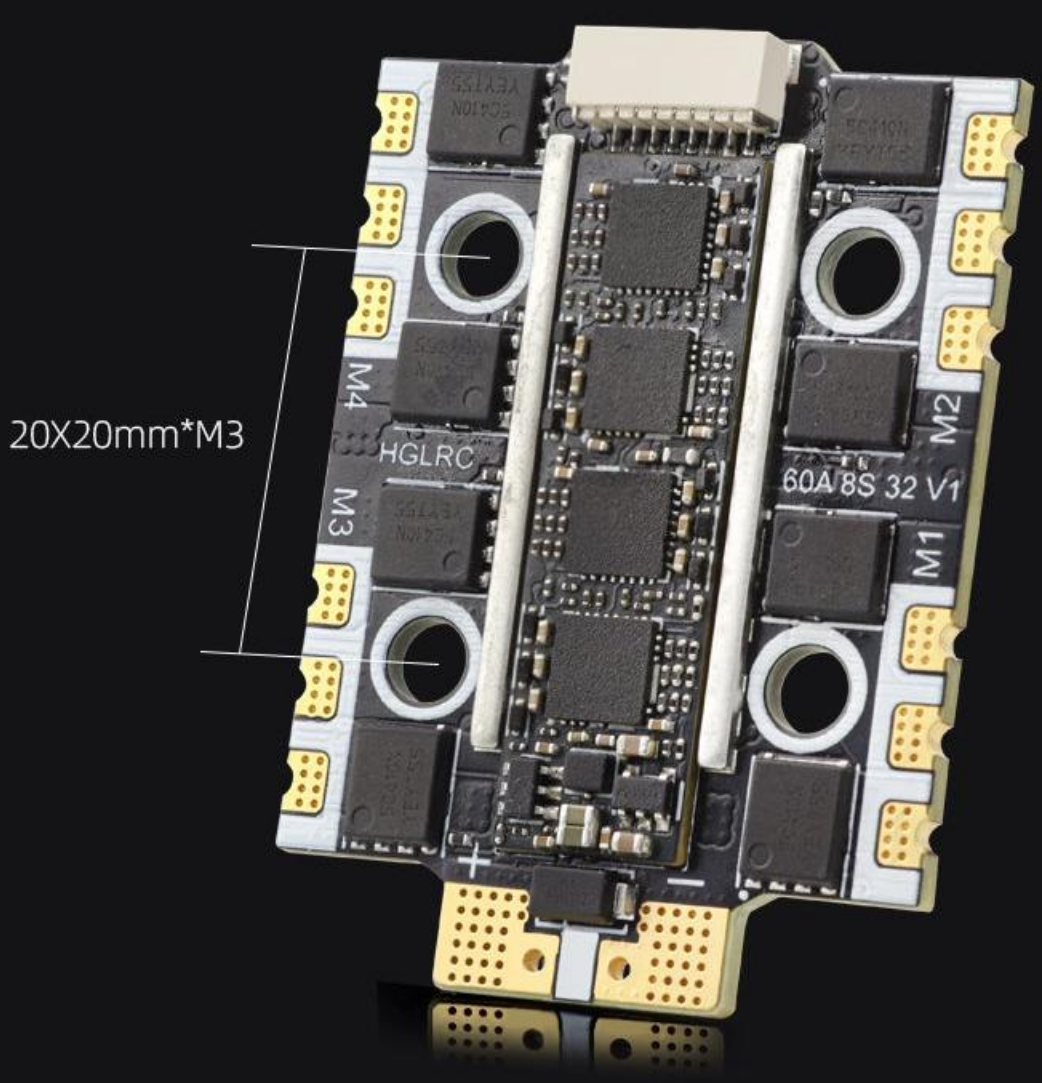


6+4 Layer PCB

provides efficient anti-interference performance

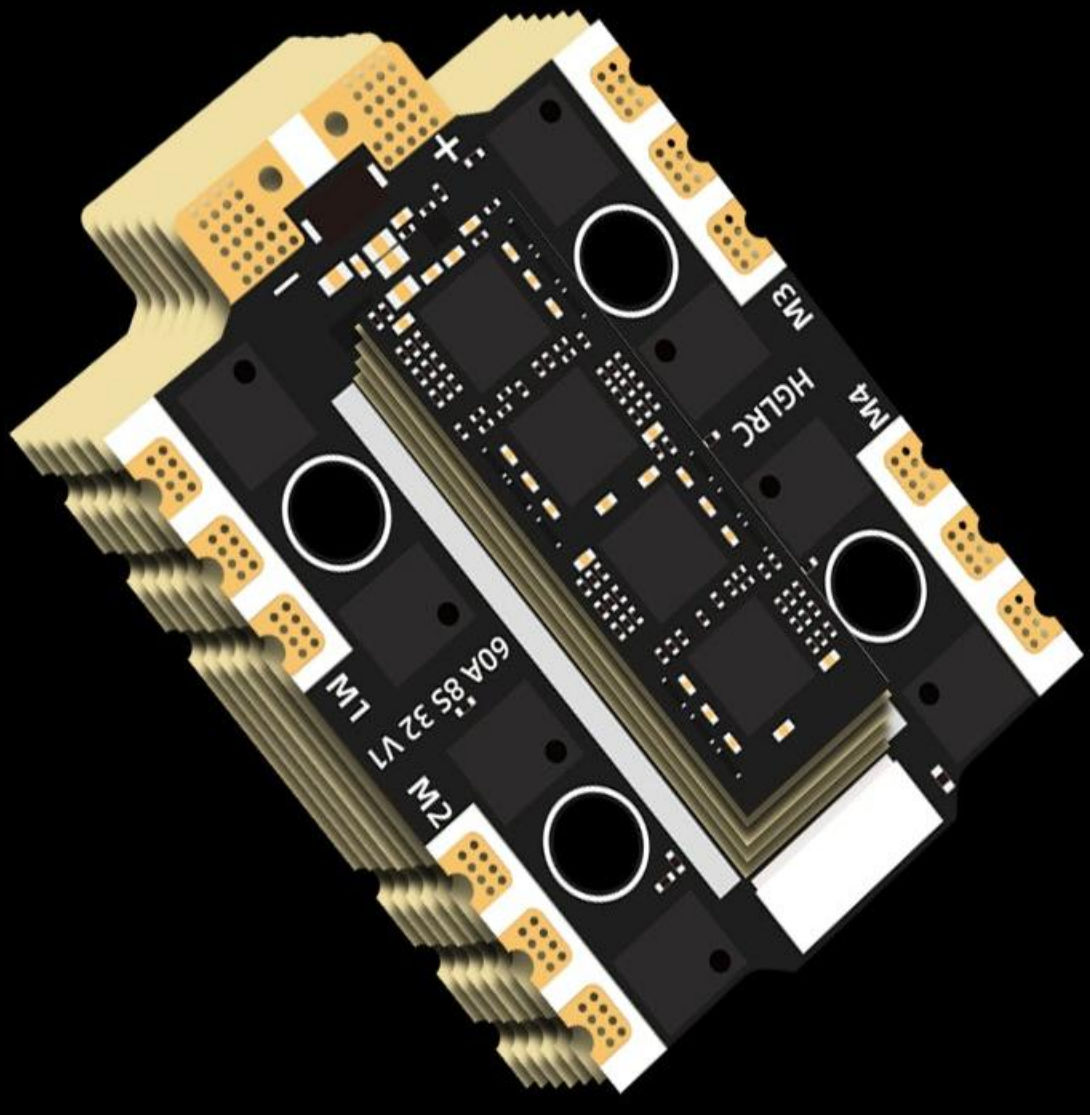

— Specification —

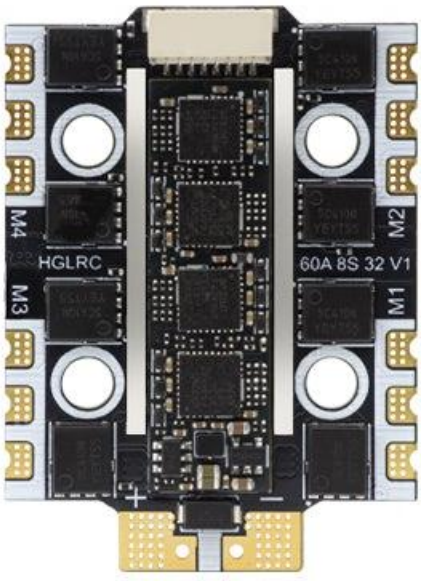

Product Name:HGLRC 60A 4IN1 MINI 8S 32-bit V1 ESC

Input Voltage:3-8S

Continuous Current:60A

Peak Current:65A(for 10 seconds)

Firmware:BL32

MCU:QF32MTF4AK8U7

Telemetry: Supported


Dimensions:46.8mm(L)X34mm(W)X6.5mm(H)

Mounting Hole Pattern:20X20mm*M3


Supported Protocols:DShot300/DShot600/Oneshot/PWM

Weight:14g

Size/Weight

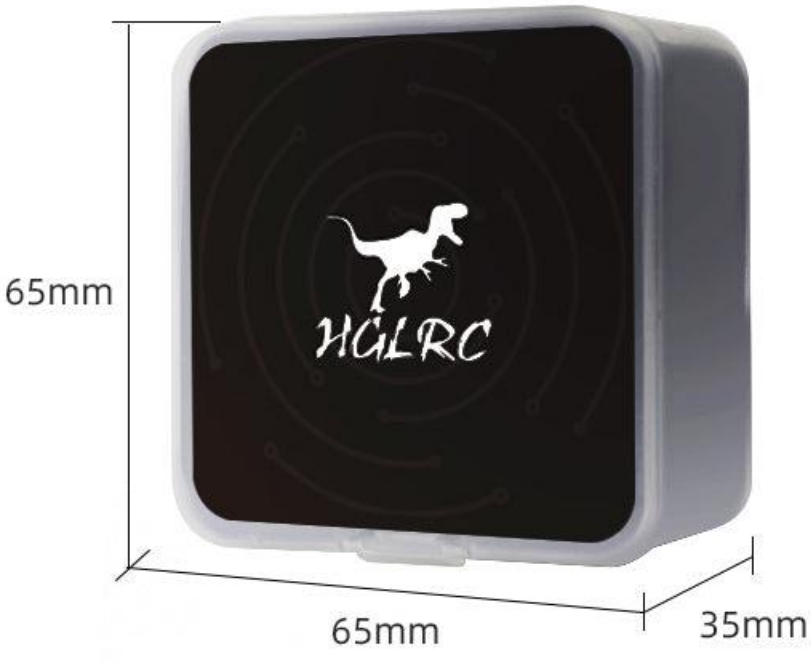

Total weight:48.6g

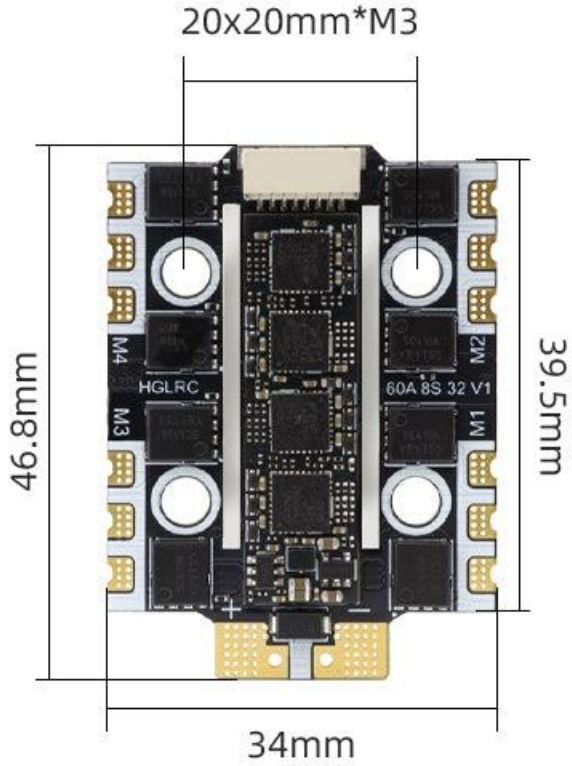

Weight:14g

— Product List —

