
Elrs Receiver

Parameter

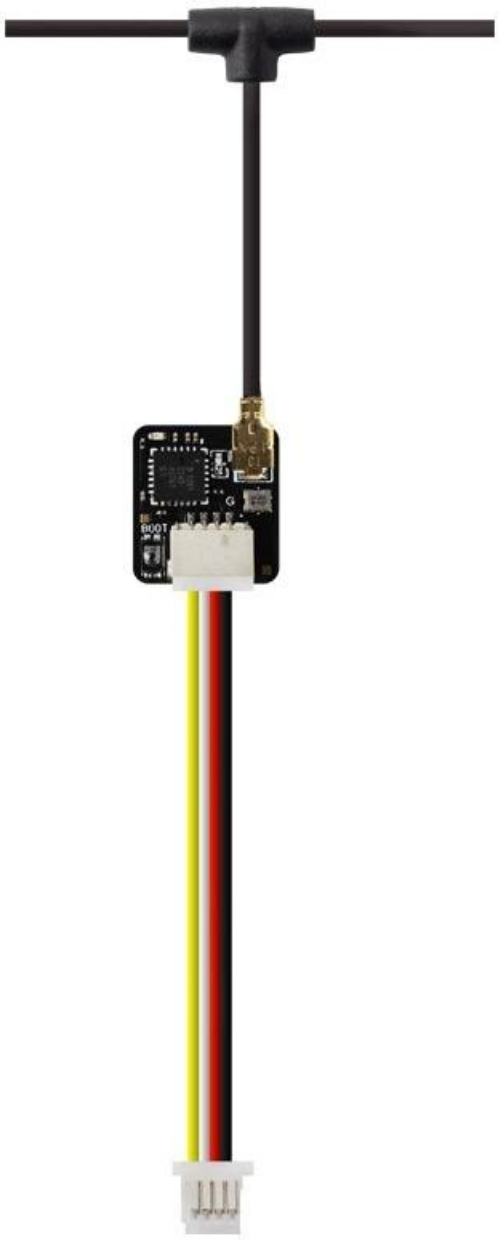

Type: ISM

MCU:ESP8285 Microcontroller

Module: SX1280IMLTRT RF module

Antenna: Omni-directional antenna

Frequency range: 2400 MHz to 2500 MHz

Maximum receiver refresh rate: 1000 Hz

Minimum receiver refresh rate: 50Hz

Operating voltage: 5v


Weight: 0.66

Size: 11.18 X 12.45mm

Peak gain: 2.23dB

Wiring Diagram

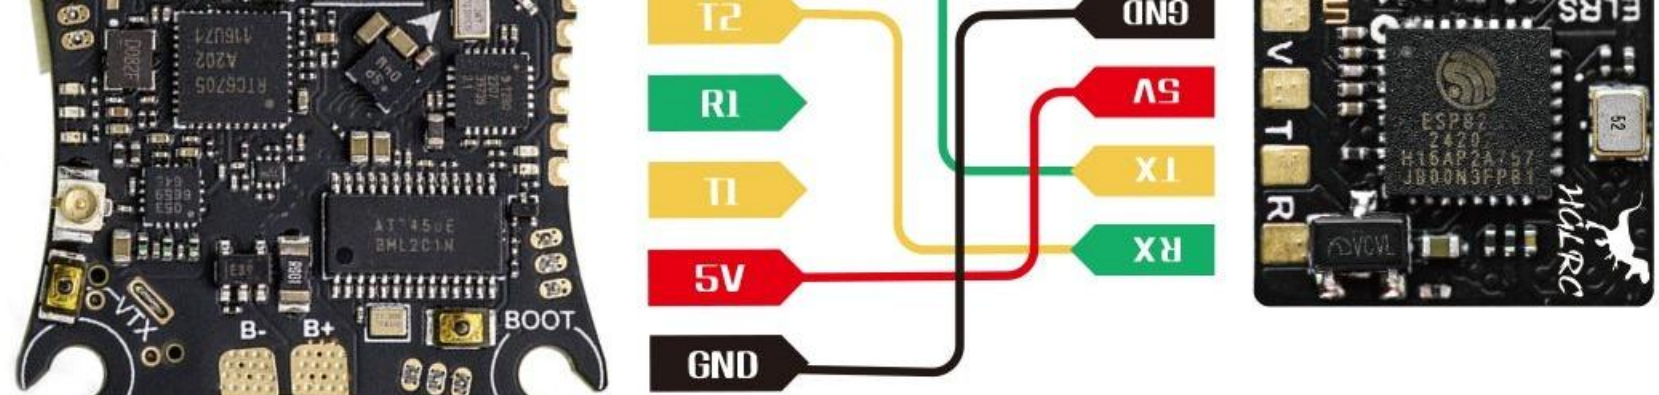


T2
R1
T1
5V
GND
GND
5V
TX
RX
B-
B+
BOOT
VTX
ESP82
2420
H16AP2A757
JB00N3FPB1
HGLRC